

# PROTECT FROM CONTAMINANTS WITH AUSTRALIAN-MADE INNOVATION

## SORBSEAL® HYBRID GEOSYNTHETIC CLAY LINERS

### TECHNOTE: ACTIVATED CARBON AND PFAS

Activated Carbon (AC) is a carbonaceous adsorbent with a large internal surface area. It is commonly used to adsorb natural organic compounds and to remove taste, odour, and synthetic organic chemicals in drinking water treatment systems. It has also been one of the most studied treatments for the removal of Per- and Poly-fluoroalkyl Substances (PFAS).



PFAS are a large group of fluorinated chemicals which have been used for more than 50 years to add nonstick, waterproof, and/or stain-resistant properties to clothing, furnishings, carpeting, cookware, food contact paper, cosmetics, and other consumer products. Due to their widespread use, they are found all over the world in soil and drinking water and have been found ubiquitously in landfill leachate (Gallen, et al., 2017; Busch, et al., 2010; Li, et al., 2012; Weber, et al., 2011; Hamid, et al., 2018).

### THE POWER OF ADSORPTION

AC works by the process of adsorption. Adsorption is the attachment or adhesion of atoms, ions and molecules (adsorbates) from a gaseous, liquid or solution medium onto the surface of an adsorbent such as AC. The porosity of AC offers a vast surface on which this adsorption can take place. There are a number of adsorption interaction mechanisms in relation to organic compounds, such as ligand exchange, electro donor-acceptor interactions, oxidative coupling, hydrophobicity, Lewis acid-base reactions, H-bonds, electrostatic interaction, and covalent bond formation (Kah, et al., 2017). From these there is strong consensus that both hydrophobicity and electrostatic interaction are the primary mechanisms involved in the adsorption of two of the main long-chain PFAS (PFOS and PFOA) onto AC (Goss, 2008; Gagliano, et al., 2020; Saeidi, et al., 2020). For adsorption to be effective it is important to match the adsorbate molecule size with the pore size and pore size distribution of the AC.

### POROSITY AND PORE SIZE DISTRIBUTION (PSD)

According to Zdravkov, et al. (2007), AC pores are roughly classified into three groups: Macropores (> 50 nm diameter), Mesopores (2-50 nm diameter), and Micropores (< 2 nm diameter). Micropores generally contribute a major part of the internal surface area. The larger macro and mesopores are regarded as the highways into the carbon particle. The combined surface area of AC is typically between 500 – 1500m<sup>2</sup>/g (Bansal & Meenakshi, 2005). The higher the porosity can mean a higher pollutant loading capacity, but it is highly dependent on the pore size distribution. For example, a high level of micropores may result in a large surface area but may not have enough entry points and transport pathways for larger molecules to take advantage of this. On the other hand, too many macropores and not enough meso and micropores may result in a lower adsorption capacity. When looking at PFAS, generally a good balance of each size category results in optimized adsorption.

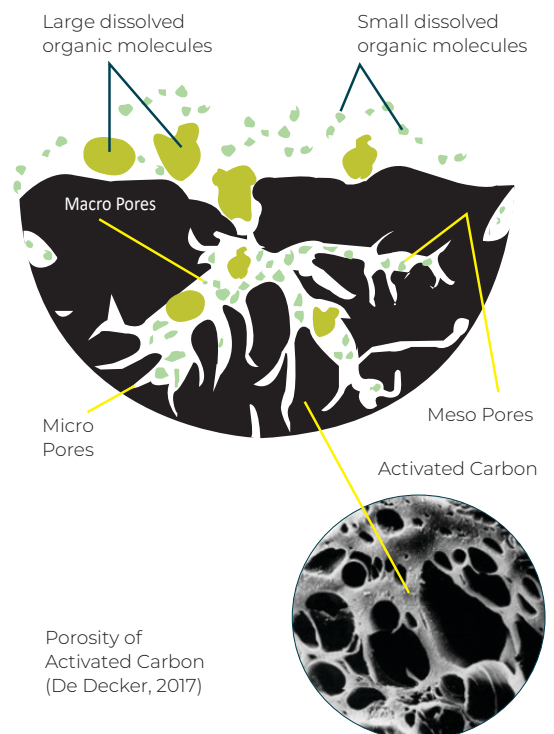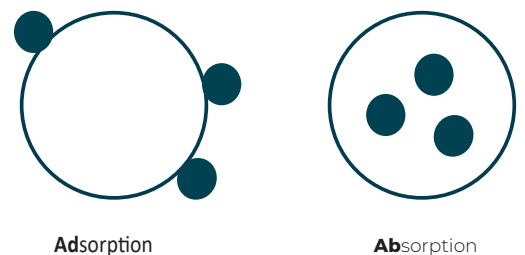

## THE IMPORTANCE OF ORIGINS

AC can be manufactured from virtually any organic material. Because of their high carbon contents however, wood, coconut shells and coal are the most commonly used raw materials. Activation may be carried out by chemical means or, more commonly, by high temperature steam (>700°C) in a controlled atmosphere. There are important differences between AC produced from wood, coconut shells and coal. Wood-based AC generally has a higher level of macropores whereas coconut-based AC has a higher level of micropores. Coal-based AC is comprised of a good balance of micro (small), meso (medium) and macro (large) pores making it a solid contender for efficient adsorption of certain organic molecules, such as PFAS (Nowicki, et al., 2014).








### WOOD



### COCONUT



### COAL

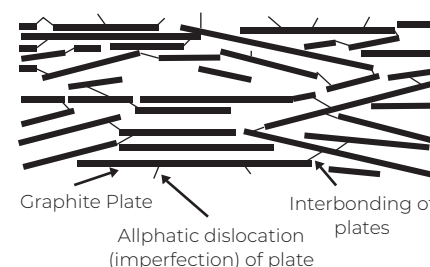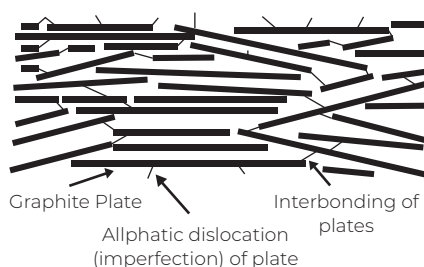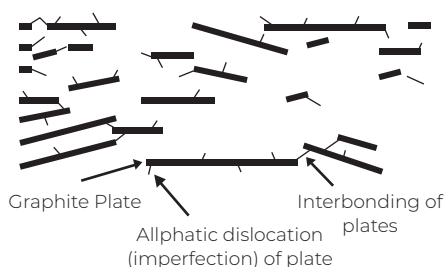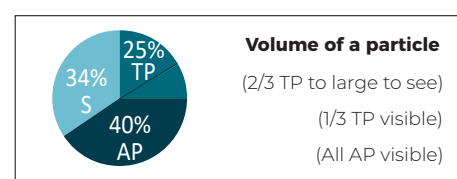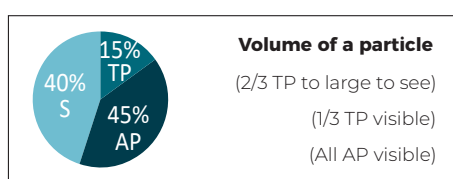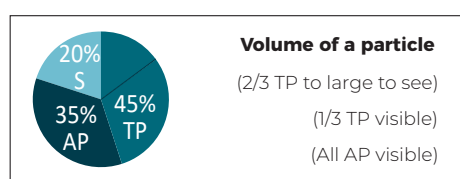

Pore Size Distribution of Activated Carbon from different sources (Nowicki, et al., 2014)

Coals are classified according to their age. Lignite, or brown coal, is the youngest type of coal followed by Sub-Bituminous, Bituminous, and finally Anthracite. The origin and age of the coal is a key factor in producing an AC with a very high specific surface area and a good PSD. Bituminous coal-based activated carbons have been shown to have superior performance in trapping a wide range of perfluorinated compounds over other activated carbon varieties (McNamara, et al., 2018).

## ATTENUATION OF PFAS

There are more than 4,700 PFAS compounds which have been identified (OECD, 2018). There have been numerous studies on the uptake of PFAS in water using activated carbon as this is the traditional technology employed by water authorities showing excellent attenuation of a wide range of long and short chain versions (McNamara, et al., 2018; Appleman, et al., 2013; Bartell, et al., 2010; Yu, et al., 2009). The level of performance is directly related to the specific activated carbon (quality, type, origin, adsorption kinetics, surface area, pore size distribution, etc), PFAS type, chain length and concentration, organic co-contaminant loadings, liquid pH, flow rates etc. Hybrid Geosynthetic Clay Liners (hGCLs) such as SORBSEAL, containing a blend of high quality, polymerised sodium bentonite powder and a high surface area AC, have been shown to effectively trap a wide range of PFAS from liquids containing other organic contaminants, such as landfill leachates (Gates, et al., 2020). While bentonite clay itself has been shown to be relatively ineffective in containing some organic pollutants due to its hydrophilicity (Bouazza, 2021), it is effective in slowing the rate of liquid transmission down to very low levels, while the high performing AC can attenuate a wide range of these organic contaminants, including PFAS.

## BIBLIOGRAPHY

- Appleman, T. D., Dickenson, E. R., Bellona, C., & Higgins, C. P. (2013). Nanofiltration and granular activated carbon treatment of perfluoroalkyl acids. *Journal of Hazardous Materials*, 260, 740-746. doi:<https://doi.org/10.1016/j.jhazmat.2013.06.033>
- Bansal, R. C., & Meenakshi, G. (2005). *Activated Carbon Adsorption*. Boca Raton, FL, USA: CRC Press. doi:<https://doi.org/10.1201/9781420028812>
- Bartell, S. M., Calafat, A. M., Lyu, C., Kato, K., Ryan, P. B., & Steenland, K. (2010, February). Rate of decline in serum PFOA concentrations after granular activated carbon filtration at two public water systems in Ohio and West Virginia. *Environmental Health Perspectives*, 118(2). doi:<https://doi.org/10.1289/ehp.0901252>
- Bouazza, A. (2021, April). Interaction between PFASs and geosynthetic liners: current status and the way forward. *Geosynthetics International*, 28(2), 214-223. doi:<https://doi.org/10.1680/jgein.20.00033>
- Busch, J., Ahrens, L., Sturm, R., & Ebinghaus, R. (2010). Polyfluoroalkyl compounds in landfill leachates. *Environmental Pollution*, Volume 158(5), Pages 1467-1471. doi:<https://doi.org/10.1016/j.envpol.2009.12.031>
- De Decker, J. (2017). *Functionalized Metal-Organic Frameworks as Selective Metal Adsorbents*. Ghent University, Department of Materials, Textiles and Chemical Engineering. Belgium: Ghent University, Faculty of Sciences. Retrieved from <http://hdl.handle.net/1854/LU-8523501>
- Gagliano, E., Sgroi, M., Vagliasindi, F. G., & Roccaro, P. (2020, March). Removal of poly- and perfluoroalkyl substances (PFAS) from water by adsorption: Role of PFAS chain length, effect of organic matter and challenges in adsorbent regeneration. *Water Research*, 171, 115381. doi:<https://doi.org/10.1016/j.watres.2019.115381>
- Gallen, C., Drage, D., Eaglesham, G., Grant, S., Bowman, M., & Mueller, J. F. (2017). Australia-wide assessment of perfluoroalkyl substances (PFASs) in landfill leachates. *Journal of Hazardous Materials*, Volume 331, Pages 132-141. doi:<https://doi.org/10.1016/j.jhazmat.2017.02.006>
- Gates, W. P., MacLeod, A. J., Fehervari, A., Bouazza, A., Gibbs, D., Hackney, R., ... Watts, M. (2020, December). Interactions of Per- and Polyfluoroalkyl Substances (PFAS) with Landfill Liners. (Z. Rengel, Ed.) *Advances in Environmental and Engineering Research*, 1(4), 40. doi:<http://dx.doi.org/10.21926/aeer.2004007>
- Goss, K.-U. (2008, May). The pKa values of PFOA and other highly fluorinated carboxylic acids. *Environmental Science and Technology*, 42(2), 456-458. doi:<https://doi.org/10.1021/es702192c>
- Hamid, H., Li, L. Y., & Grace, J. R. (2018). Review of the fate and transformation of per- and polyfluoroalkyl substances (PFASs) in landfills. *Environmental Pollution*, 235, 74-84. doi:<https://doi.org/10.1016/j.envpol.2017.12>
- Kah, M., Sigmund, G., Xiao, F., & Hofmann, T. (2017, November). Sorption of ionizable and ionic organic compounds to biochar, activated carbon and other carbonaceous materials. *Water Research*, 124, 673-692. doi:<https://doi.org/10.1016/j.watres.2017.07.070>
- Li, B., Danon-Schaffer, M. N., Li, L. Y., Ikonomou, M. G., & Grace, J. R. (2012). Occurrence of PFCs and PBDEs in Landfill Leachates from Across Canada. *Water Air Soil Pollution*(223), 3365-3372. doi:<https://doi.org/10.1007/s11270-012-1115-7>
- McNamara, J. D., Franco, R., Mimna, R., & Zappa, L. (2018, January). Comparison of Activated Carbons for Removal of Perfluorinated Compounds From Drinking Water. *Journal American Water Works Association*, 110(1), E2-E14. doi:<https://doi.org/10.5942/jawwa.2018.110.0003>
- Nowicki, H., Schuliger, W., Nowicki, G., & Sherman, B. (2014, June 17). Evaluation of Activated Carbon Performance. *Water Conditioning and Purification Magazine*. Retrieved April 23, 2021, from <http://wcponline.com/2014/06/17/evaluation-activated-carbon-performance/>
- OECD. (2018). *Toward a new comprehensive global database of per- and polyfluoroalkyl substances (PFASs): summary report on updating the OECD 2007 list of per- and polyfluoroalkyl substances (PFASs)*. OECD, Chemicals Committee and the Working Party on Chemicals, Pesticides and Biotechnology. Retrieved from [https://www.oecd.org/officialdocuments/publicdisplaydocumentpdf/?cote=ENV-JM-MONO\(2018\)7&doclanguage=en](https://www.oecd.org/officialdocuments/publicdisplaydocumentpdf/?cote=ENV-JM-MONO(2018)7&doclanguage=en)
- Saeidi, N., Kopinke, F.-D., & Georgi, A. (2020, February). Understanding the effect of carbon surface chemistry on adsorption of perfluorinated alkyl substances. *Chemical Engineering*, 381, 122689. doi:<https://doi.org/10.1016/j.cej.2019.122689>
- Weber, R., Watson, A., Forter, M., & Oliaei, F. (2011, January). Persistent organic pollutants and landfills - a review of past experiences and future challenges. *Waste Management and Research*, 29(1), 107-121. doi:<https://doi.org/10.1177/0734242X10390730>
- Yu, Q., Zhang, R., Deng, S., Huang, J., & Yu, G. (2009). orption of perfluorooctane sulfonate and perfluorooctanoate on activated carbons and resin: Kinetic and isotherm study. *Water Research*, 43(4), 1150-1158. doi:<https://doi.org/10.1016/j.watres.2008.12.001>
- Zdravkov, B. D., Čermák, J. J., Šefara, M., & Janků, J. (2007, March). Pore classification in the characterization of porous materials: A perspective. *Central European Journal of Chemistry*, 5, 385-395. doi:<https://doi.org/10.2478/s11532-007-0017-9>



Visit [geofabrics.co](https://www.geofabrics.co) or call 1300 60 60 20

**GEOFABRICS**<sup>®</sup>  
Sustainable solutions