

# INSTALLATION GUIDE

Rev: 02. Issue Date June 2015

# GREEN TERRAMESH SYSTEM CONTRACTORS SHEET

## Reference

Please refer to full specification NZ-PSS-GTMESH 10/04 and installation drawing TM\_GreenNZ.dwg.

**Working at height** - Refer to the Health and Safety provisions in Employment Act 1992 regarding the need to take all practicable steps to ensure safety of workers. Further information of on how to prevent falls from height can be obtained from the Department of Labour at <a href="https://www.dol.govt.nz">www.dol.govt.nz</a> and Site Safe New Zealand at <a href="https://www.sitesafe.org.nz">www.sitesafe.org.nz</a>

# Supply

Green Terramesh units are pre-assembled during manufacturing (excluding Biomac Grasstrike R300 erosion blankets) and are supplied folded flat in bundles of 30 units. The biodegradable Biomac Grasstrike R300 matting is supplied in rolls 1.8m x 30m and is used where a vegetated face option has been chosen.

#### **Assembly**

Prior to installing the assembled units, the foundation shall be prepared to the correct lines and grades . Surface irregularities, loose material, and vegetation shall be removed during the preparation of the foundation.

Units are carried to and placed in their final position. Raise the unit's facing, turn the triangular stiffening brackets perpendicular to the face and connect to the base panel with lacing wire or steel fasteners.

## **Biomac Grasstrike Placement**

The Biomac Grasstrike R300 is rolled out, placed through the triangular brackets located behind the front face of the Green Terramesh unit and fixed top and bottom to the mesh face. Slitting of the Biomac Grasstrike R300 in line with the triangular brackets is required to ensure that it extends horizontally back against the horizontal mesh by at least 400mm top and bottom.

## **Backfill and Compaction**

Approved backfill shall be placed up to 500mm of the face in maximum 300mm vertical lifts and compacted to a minimum of 95% of Standard Proctor Density.

Compaction is to proceed parallel to the slope face, ensuring that the compacting machine does not come within 1m of the face element. Lighter compaction equipment should be used towards the front face zone.


# **Topsoil Placement**


Vegetative soil shall be placed in the 0.3m to 0.5m zone of the structure, behind the Green Terramesh and Biomac Grasstrike R300 face to enable long-term sustainable vegetation growth.


The soil should be firmly compacted by plate or small machine compactor. Overfill topsoil zone by 5% to allow for some local settlement of the vegetative soil.


# Completion


The Biomac Grasstrike R300 and 1m long Green Terramesh tieback is folded back into the slope ready for the next unit. The next row of Green Terramesh units shall be laid out as previously described directly on the lower Green Terramesh units. The upper and lower units shall be all connected along the front reinforced bar.









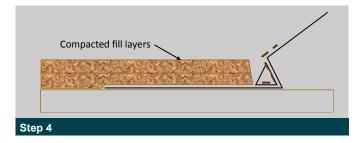



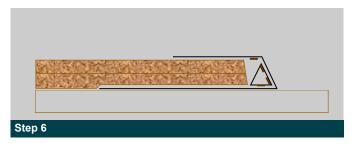

# **MACCAFERRI**

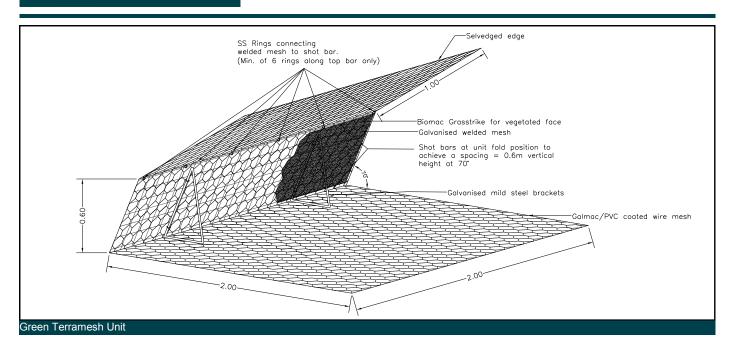


# **Green Terramesh Combined with Geogrid**

## Installation

Prior to placing of any geogrid reinforcement, the soil profile shall be graded to the lines and grades shown on the construction drawings. Surface irregularities, loose material, and vegetation shall be removed during the preparation of the foundation.

The geogrid reinforcement shall be laid out in a manner so that the strength direction (roll direction) is perpendicular to the slope face. Proper geogrid orientation is of extreme importance due to the difference in geogrid strengths in either direction. The contractor will be responsible for proper geogrid orientation. The geogrids shall be cut to correct lengths and placed at correct elevation as shown on the construction drawings.

Installation of the Green Terramesh® units and Biomac Grasstrike R300 follows the steps described on page 1. Once the first row of units are placed in position, the units shall be connected through the geogrid layer along the front reinforced bar using lacing wire or stainless steel fasteners.

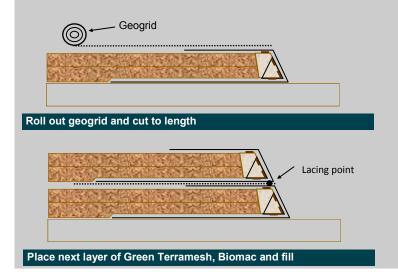



Green Terramesh Wall - New Zealand

# **Geofabrics New Zealand Ltd**

14 Goodman Place, PO Box 12536, Penrose, Auckland, New Zealand T: (+64) 9 6436495 F: (+64) 9 634 6492, FREEPHONE 0800 60 60 20 E: sales@geofabrics.co.nz

The information contained in this brochure is general in nature. In particular the content of this brochure does not take account of specific conditions that may be present at your site. Site conditions may after the performance and longwity of the product and in extreme cases may make the product wholiv unsuitable. Actual dimensions and performance may vary, if your project requires accuracy to a certain specified tolerance level you must advise before ordering the product from us. We can then advise whether the product will meet the required tolerances. Where provided, installation instructions cover installation of product in site conditions that are conductive to its use and optimum performance. Hyou have any doubts as to the installation instructions cover installation to your site, please contact us for clarification before commencing installation. This trochure is bould not be used for construction purposes and in all cases we recommend that advice be obtained from a suitably qualified consulting engineer or industry specialist before proceeding with installation. This brochure is current as at the date printed below. Geofabrics New Zealand Ltd may make amendments to this document at any time. Please refer to our website, or contact our nearest sales office to ensure you have the most current version. © Copyright held by Geofabrics New Zealand Ltd. All rights are reserved and no part of this publication may be copied without prior permission.