

GEOFABRICS CASE STUDY



ELCOROCK SAND CONTAINERS SAVE THE MAROOCHY FROM ROCKING

PRODUCTS USED

ELCOROCK® GEOTEXTILE SAND CONTAINER

- Made in Australia with Texcel geotextile - a unique staple fibre blend of polyester and polypropylene, providing flexibility and allowing the product to resist the natural forces of the marine environment
- Filled with sand and used to form a stabilising and defensive barrier against erosion in harsh coastal environments by building breakwaters, sea walls, revetments, groynes and artificial reefs
- Highly resistant to abrasion, hydrocarbon, impact damage and UV degradation
- Precise size and shape can be made to meet site specific requirements



SIMON RESTALL
COASTAL CONSULTANT

✉ s.restall@geofabrics.com.au
📍 ORMEAU, QLD, AU

PROJECT DESCRIPTION

Geofabrics Elcorock Geotextile Sand Containers have a long-standing relationship with Maroochydore, more specifically, where the natural Maroochy River meets the ocean.

This natural river system is dynamic and meanders North and South historically, which can result in changing beach profile and erosion - threatening infrastructure and property. This erosion is exacerbated by king tides and storm events.

OUR SOLUTION

In 2001, an emergency sea wall and a groyne were built for immediate protection of the Cotton Tree Holiday Park as it was at threat of an inundation from king tides and storm events. For 20 years, the Geofabrics Elcorock Geotextile Sand Containers system performed as designed and were widely accepted by the community. Eventually large wave events caused minor displacement to the upper layers of the groynes.

The Sunshine Coast Council considered reconstructing the groynes with rock, however, this proposition was not supported by locals. Rock is widely accepted as a conventional construction material, although it is not always the best choice for safe and enjoyable beach amenity. Additionally, locals argued that a rock wall would forever change and destroy the natural beauty of the area. Beachgoers, surfers and visitors alike prefer the Elcorock Geotextile Sand Container due to its natural look, feel and environmental protection capabilities.

2001 EMERGENCY SEA WALL BUILT

GROYNE #1 BUILT **2001**

2003 GROYNES #2, #3 & #4 BUILT

UPGRADE OF GROYNES #3 & #4 & A NEW SEA WALL **2020**


2022 UPGRADE OF GROYNES #1 & #2 & A NEW SEA WALL

GEOFABRICS®
Sustainable solutions



As part of the tender process, Geofabrics extracted a number of samples from the site and tested them in a laboratory in order to validate existing weathering data and real time durability over a 20-year period. The results demonstrated that the Elcorock Geotextile Sand Containers would continue to perform for decades to come as there is no significant deterioration in the material properties.

The Sunshine Coast Council officers recommended retaining the Geofabrics Elcorock Geotextile Sand Containers groynes rather than replacing with rock. The seawall was reconstructed using 1,330 Elcorock 2.5m³ containers. Groynes #3 & #4 were reconstructed using 569 of the new and larger 5.0m³ containers. Due to the increased size and mass of the container, the contractor developed modified filling and placement techniques to achieve the design outcome.

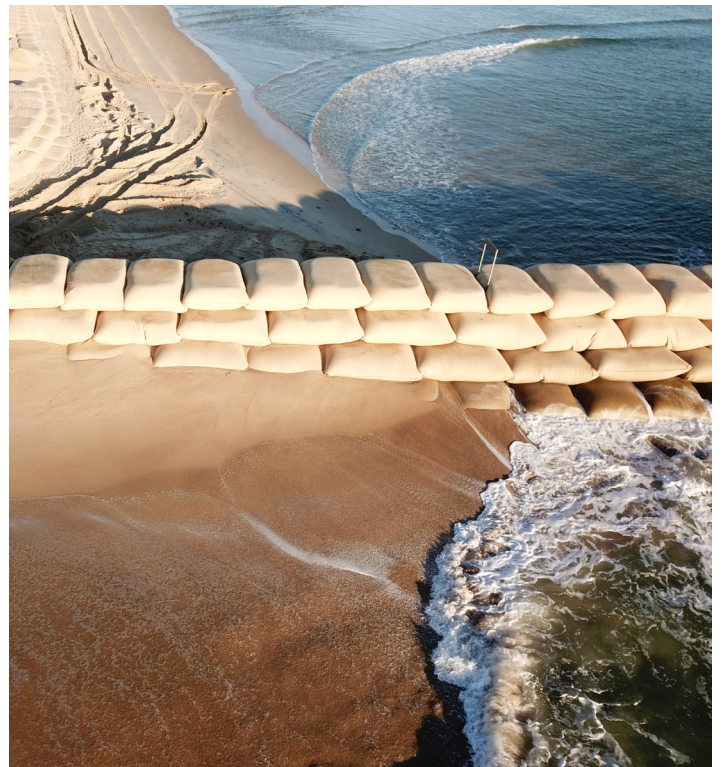

Visit **geofabrics.co** or call 1300 60 60 20 (AU)
or **geofabrics.co.nz** or call 0800 60 60 20 (NZ)

GEOFABRICS[®]
Sustainable solutions

IMPORTANT NOTICE - DISCLAIMER - The information contained in this brochure is general in nature. In particular the content of this brochure does not take account of specific conditions that may be present at your site. For full disclaimer and further information regarding installation visit geofabrics.co/disclaimer
© Copyright held by Geofabrics Australasia Pty Ltd. All rights are reserved and no part of this publication may be copied without prior permission. Published March 2022.

